

**KEY LEGEND & SPECIFICATIONS:**



**FLOORFLEX VINYL TILE: LAPIS LAZULI** Code: MF2525 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m<sup>2</sup> and 6.5m<sup>2</sup> per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.



**FLOORFLEX VINYL TILE: TAMBOTI** Code: MF 2515 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m<sup>2</sup> and 6.5m<sup>2</sup> per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.



**SUPERFLEX VINYL TILE: CLOUD WISP** Code: MS 131 (or equally approved) Supply and fix 2mm thick 300x300mm fully flexible vinyl tiles manufactured in accordance to SANS 786 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m<sup>2</sup> and 6.5m<sup>2</sup> per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.

**VINYL TILE NOTE:** The flooring must be rolled in both directions with an articulated 68kg three-sectional roller immediately after it has been laid into the adhesive. The newly laid floor must, after 48 hours, be stripped using FloorworX Stripper (or equally approved) scrubbed using a diluted solution of FloorworX Rinse (or equally approved) and then sealed with three coats of FloorworX Silk Matt Sealer (or equally approved).



Painted standard pine skirting 21x96mm (D x H)  
Refer to General Specification for paint specification.



**TILETORIA TILES SKIRTING** Shiny white 200x200mm GR1 1.52 MPB open wall 121.60MPP (or equal approved) cut to 100mm high. Tile skirting to be finished with a **KIRK MARKETING M-TRIM** PVC round edge tile 7mm size (depth) (or equal approved) Colour: White (PEE01)  
**Tile Code:** OSH100LA  
**Trim Code:** PRE070



**TILETORIA WALL TILES** Shiny white 200x200mm GR1 1.52 MPB open wall 121.60MPP (or equal approved). Refer to Room Layout Drawings for height of tiles. Tile to be finished with a **KIRK MARKETING M-TRIM** PVC round edge tile 7mm size (depth) (or equal approved) Colour: White (PEE01)  
**Tile Code:** OSH100LA  
**Trim Code:** PRE070

**TAL SUPER WHITE** wall grout for 3mm wide tile joints. (or equal approved) REFER TO GENERAL SPECIFICATION.

**GENERAL NOTES:**

THIS DRAWING MUST BE READ IN CONJUNCTION WITH THE GENERAL SPECIFICATION DOCUMENT AND LAYOUT DRAWINGS.

SAMPLES OF ALL FINISHES BE PROVIDED TO ARCHITECT FOR APPROVAL PRIOR TO ORDER AND INSTALLATION.

IT IS THE CONTRACTORS RESPONSIBILITY TO FAMILIARIZE THEMSELVES WITH THE DRAWINGS. SHOULD ANYTHING BE UNCLEAR THE CONTRACTOR NEEDS TO CONSULT FURTHER WITH THE CONSULTANT TEAM.

ALL TILES' ADHESIVE TO BE APPLIED ON THE FULL EXTENT OF THE TILE BACKING TO ALLOW FOR A FULL BONDAGE TO THE SUBSTRATE.

**GENERAL NOTES**  
THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEER'S DRAWING.

ALL DIMENSIONS, LEVELS, ETC. ARE TO BE CHECKED BEFORE ANY WORK IS COMMENCED AND ANY DISCREPANCIES NOTED TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.

ONLY FIGURED DIMENSIONS TO BE USED. SCALING OF DRAWINGS IS NOT ADVISABLE.

ALL RIGHTS RESERVED. NO PARTS OF THIS DESIGN SHALL BE REPRODUCED, USED ELSEWHERE AND/OR IN ANY WAY WITHOUT PRIOR PERMISSION FROM THE ARCHITECT/ENGINEER.

**GEOTECH INFORMATION**

SOIL TYPE: \_\_\_\_\_  
ASSUMED SOIL BEARING CAPACITY: \_\_\_\_\_ kPa  
RECOMMENDED FOUNDATION TYPE: \_\_\_\_\_  
RECOMMENDED FOUNDATION DEPTH: \_\_\_\_\_

REV No.	DATE	DESCRIPTION

**MUNICIPAL APPROVAL**

NAME: \_\_\_\_\_  
SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**STAMPS:**

**CLIENT APPROVALS**

**North West Department of Education:**  
NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_  
**DBSA Architect:**  
NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_  
**DBSA OH&S:**  
NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**PRINCIPAL AGENT**

**KITSO BOTHALE**  
CONSULTING ENGINEERS (Pty) Ltd  
Tel +27(0)12 663 1357 - Cell +27 (0) 82 903 8497 - Fax +27(0)12 663 3331  
E-mail kbotso@kitso.co.za Website www.kitso.co.za  
Unit 2 International Business Gateway, 18 Midridge Park, C/o Pioneer Avenue & Elizabeth Road, Extension 6 Midridge Park, Midrand, 1682

COMPETENT CONTACT PERSON: Bruce Mutarwa CONTACT No: +27 (0)12 663 1357  
FIRM REG No: T.B.C.

**education**  
Lefapha la Thuto  
Onderwys Departement  
Department of Education  
**NORTH WEST PROVINCE**

**DEPARTMENT OF BASIC EDUCATION**  
222 STRUBEN STREET  
PRETORIA

DISCIPLINE  
**ARCHITECTURAL**

PROJECT NAME  
**Tshedimoso Primary School**  
PORTION 1 OF THE FARM MOOIPAN No. 104 - IO  
MEASURING - 33 479 m<sup>2</sup>

PROJECT STATUS

STAGE 1-3	STAGE 4	STAGE 5-6
CONCEPT	TENDER	CONSTRUCTION

DESCRIPTION  
**ADMINISTRATION (BLOCK 1) FLOOR FINISH LAYOUT**

SCALE:  
AS SHOWN

**DRAWN:** D. Basson  
**CHECKED:** M.L. van der Walt


REG No: PSAT 30522947 REG No: Pr.Arch. 7292

SIGNATURE

PROJECT NUMBER: S-TSH-001-30 DATE: 11-10-2021

OCCUPANCY CLASSIFICATION: A3 DWG No: 201

REV No: 01

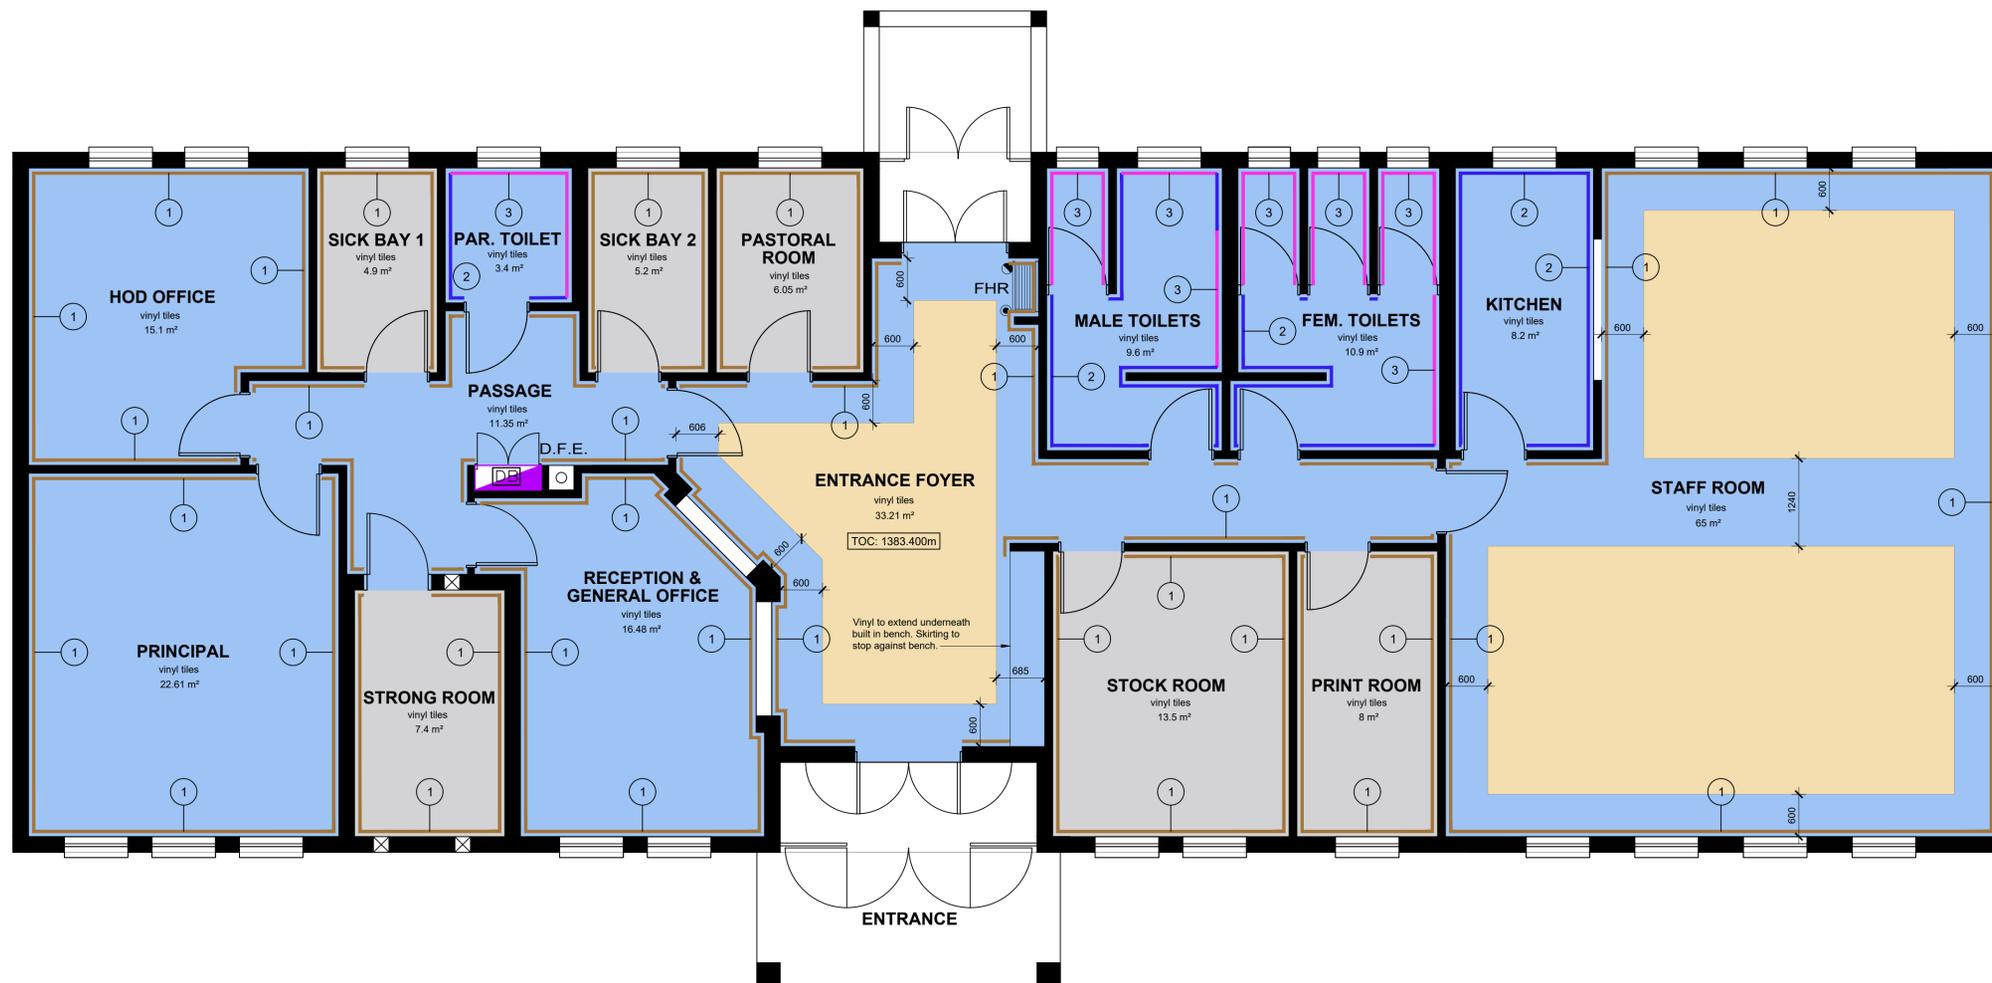

**BLOCK 1 - ADMIN BUILDING FLOOR FINISH LAYOUT**  
Scale 1:50