

GENERAL NOTES
THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEER'S DRAWING.

ALL DIMENSIONS, LEVELS, ETC. ARE TO BE CHECKED BEFORE ANY WORK IS COMMENCED AND ANY DISCREPANCIES NOTED TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.

ONLY FIGURED DIMENSIONS TO BE USED. SCALING OF DRAWINGS IS NOT ADVISABLE.

ALL RIGHTS RESERVED. NO PARTS OF THIS DESIGN SHALL BE REPRODUCED, USED ELSEWHERE AND/ OR IN ANY WAY WITHOUT PRIOR PERMISSION FROM THE ARCHITECT/ ENGINEER.

GEOTECH INFORMATION

SOIL TYPE: _____
ASSUMED SOIL BEARING CAPACITY: _____ kPa
RECOMMENDED FOUNDATION TYPE: _____
RECOMMENDED FOUNDATION DEPTH: _____

REV No.	DATE	DESCRIPTION
2	10-08-'21	General update
3	21-10-'21	Quantities coordinated. Paint spec updated

MUNICIPAL APPROVAL

NAME: _____
SIGNATURE: _____ DATE: _____

STAMPS:

CLIENT APPROVALS

North West Department of Education:
NAME: _____ SIGNATURE: _____ DATE: _____

DBSA Architect:
NAME: _____ SIGNATURE: _____ DATE: _____

DBSA OH&S:
NAME: _____ SIGNATURE: _____ DATE: _____

PRINCIPAL AGENT

KITSO BOTHALE
CONSULTING ENGINEERS (Pty) Ltd.
Tel +27(0)12 663 1357 - Cell +27 (0) 82 903 8497 - Fax +27(0)12 663 1331
Email: kbotso@kitso.co.za Website: www.kitso.co.za
Unit 2 International Business Gateway, 18 Midridge Park, C/o Pioneer Avenue & Elizabeth Road, Extension 6 Midridge Park, Midrand, 1682

COMPETENT CONTACT PERSON: Bruce Muturwa CONTACT No: +27 (0)12 663 1357
FIRM REG No: T.B.C.



education
Lefapha la Thuto
Onderwys Departement
Department of Education
NORTH WEST PROVINCE

DEPARTMENT OF BASIC EDUCATION
222 STRUBEN STREET
PRETORIA

DISCIPLINE
ARCHITECTURAL

PROJECT NAME
Tshedimoso Primary School
PORTION 1 OF THE FARM MOOIPAN No. 104 - IO
MEASURING - 33 479 m²

PROJECT STATUS

STAGE 1-3	STAGE 4	STAGE 5-6
CONCEPT	X TENDER	CONSTRUCTION

DESCRIPTION
Door schedule (2)

SCALE:
AS SHOWN

DRAWN: NAME OF COMPETENT PERSON: M.L. van der Walt
CHECKED: NAME OF COMPETENT PERSON: A.A. Steyn

REG No: Pr.Arch. 7292 SIGNATURE: _____
REG No: Pr.Arch. 20832 SIGNATURE: _____

PROJECT NUMBER
S-TSH-001-30

DATE:
10-08-2021

OCCUPANCY CLASSIFICATION
A3

DWG No:
409


REV No:
03

DOOR SCHEDULE DOOR NO. **D 8**

GENERAL NOTES:
Measure final dimensions of all openings prior to ordering

IRONMONGERY:

QTY	CODE	PRODUCT DESCRIPTION
1x pair	S565G01-44-0955	SEAGULL SS LEVER HANDLE ON PLATE
1x each	L-2209-7855	UNION EURO CYL LOCK ONLY SS
1x each	CY2X19	UNION GEMINI THUMBTURN CYLINDER (60mm)
1x each	CZ8731SC	DOOR STOP

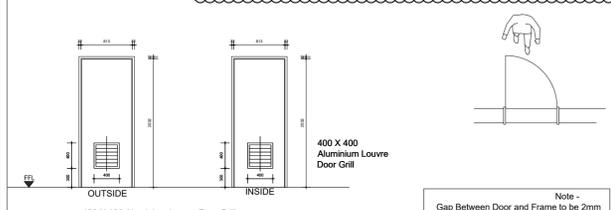

400 X 400 Aluminium Louvre Door Grill

Note - Gap Between Door and Frame to be 2mm Max. on all Sides Including Threshold

QUANTITY & HAND 2 (FOR HAND - REFER TO PLANS) TEA KITCHEN

DOOR & FINISH
2032 x 813 SEMI-SOLID DOOR WITH MASONITE FINISH SUITABLE FOR PAINTING. DOOR TO BE SUPPLIED COMPLETE AS PER MANUFACTURERS SPECS.
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL COLOUR: WOOD SMOKE 40YY 41054


FRAME & FINISH
STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1129-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm x 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS FOR POWERFLOATED CONCRETE FLOORS. FRAME FOR 110mm WALL
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Full Coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL COLOUR: STORM BIRD 20YY 11017

DOOR SCHEDULE DOOR NO. **D 9**

GENERAL NOTES:
Measure final dimensions of all openings prior to ordering

IRONMONGERY:

QTY	CODE	PRODUCT DESCRIPTION
1x pair	S565G01-44-0955	SEAGULL SS LEVER HANDLE ON PLATE
1x each	L-2209-7855	UNION EURO CYL LOCK ONLY SS
1x each	CY2X19	UNION GEMINI THUMBTURN CYLINDER (60mm)
1x each	CZ8731SC	DOOR STOP

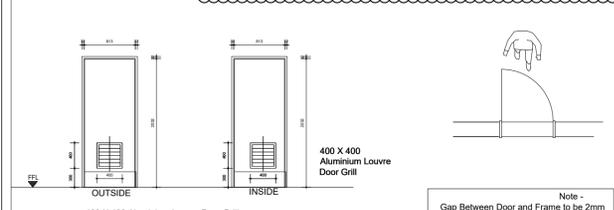

400 X 400 Aluminium Louvre Door Grill


Note - Gap Between Door and Frame to be 2mm Max. on all Sides Including Threshold

QUANTITY & HAND 5 (FOR HAND - REFER TO PLANS) STORE

DOOR & FINISH
2032 x 813 SEMI-SOLID DOOR WITH MASONITE FINISH SUITABLE FOR PAINTING. DOOR TO BE SUPPLIED COMPLETE AS PER MANUFACTURERS SPECS. DOOR TO BE SUPPLIED WITH TIMBER LOOK LOCK TO THE IRONMONGERY AS SPECIFIED. DOOR TO BE PROVIDED WITH 250mm HIGH x 1.6mm STAINLESS STEEL PROTECTION PLATE
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL COLOUR: WOOD SMOKE 40YY 41054

FRAME & FINISH
STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1129-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm x 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS FOR POWERFLOATED CONCRETE FLOORS. FRAME FOR 110mm WALL
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Full Coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL COLOUR: STORM BIRD 20YY 11017


ALL DIMENSIONS TO BE CHECKED ON SITE

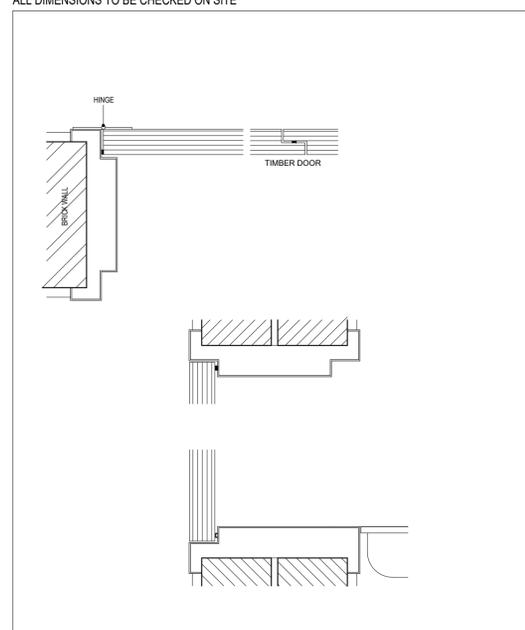

DETAILS EXTERNAL DOORS RUBBER SEALS

Scale 1 : 5 Drawn Drawing Rev. 450-01 0

ALL DIMENSIONS TO BE CHECKED ON SITE

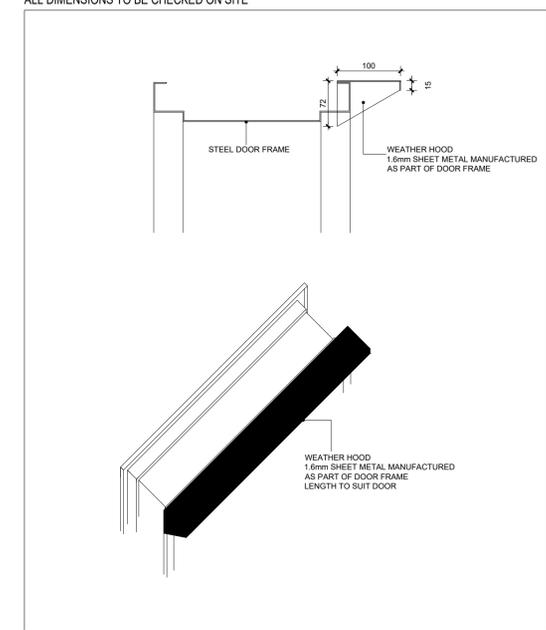

DETAILS EXTERNAL DOORS RUBBER SEALS

Scale 1 : 5 Drawn Drawing Rev. 450-02 0