

**GENERAL NOTES**  
THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEER'S DRAWING.

ALL DIMENSIONS, LEVELS, ETC. ARE TO BE CHECKED BEFORE ANY WORK IS COMMENCED AND ANY DISCREPANCIES NOTED TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.

ONLY FIGURED DIMENSIONS TO BE USED. SCALING OF DRAWINGS IS NOT ADVISABLE.

ALL RIGHTS RESERVED. NO PARTS OF THIS DESIGN SHALL BE REPRODUCED, USED ELSEWHERE AND/ OR IN ANY WAY WITHOUT PRIOR PERMISSION FROM THE ARCHITECT/ ENGINEER.

**GEOTECH INFORMATION**

SOIL TYPE: \_\_\_\_\_  
ASSUMED SOIL BEARING CAPACITY: \_\_\_\_\_ kPa

RECOMMENDED FOUNDATION TYPE: \_\_\_\_\_

RECOMMENDED FOUNDATION DEPTH: \_\_\_\_\_

REV No.	DATE	DESCRIPTION
2	10-08-'21	General update
3	21-10-'21	Quantities coordinated. Paint spec updated


**MUNICIPAL APPROVAL**

NAME: \_\_\_\_\_  
SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**STAMPS:**

**CLIENT APPROVALS**

**North West Department of Education:**

NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**DBSA Architect:**

NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**DBSA OH&S:**


NAME: \_\_\_\_\_ SIGNATURE: \_\_\_\_\_ DATE: \_\_\_\_\_

**PRINCIPAL AGENT**

**KITSO BOTHLALE**  
CONSULTING ENGINEERS  
Tel +27(0)12 663 1357 - Cell +27 (0) 82 903 8497 - Fax +27(0)12 663 1331  
E-mail: [Kitso@kitso.co.za](mailto:Kitso@kitso.co.za) Website: [www.kitso.co.za](http://www.kitso.co.za)  
Unit 2 International Business Gateway, 18 Midridge Park, C/o Pioneer Avenue & Elizabeth Road, Extension 5 Midridge Park, Midrand, 1682



COMPETENT CONTACT PERSON:	CONTACT No: +27 (0)12 663 1357
Bruce Mutarwa	FIRM REG No: T.B.C.



**education**  
Lefapha la Thuto  
Onderwys Departement  
Department of Education  
**NORTH WEST PROVINCE**

**DEPARTMENT OF BASIC EDUCATION**  
**222 STRUBEN STREET**  
**PRETORIA**

**DISCIPLINE**  
**ARCHITECTURAL**

**PROJECT NAME**

**Tshedimoso Primary School**

PORTION 1 OF THE FARM MOOIPAN No. 104 - IO  
MEASURING - 33 479 m<sup>2</sup>

**PROJECT STATUS**

STAGE 1-3	STAGE 4	STAGE 5-6
CONCEPT	X TENDER	CONSTRUCTION

**DESCRIPTION**

**Door Schedule**

SCALE:  
AS SHOWN

**DRAWN:**  
NAME OF COMPETENT PERSON:

M.L. van der Walt

REG No: Pr.Arch. 7292

SIGNATURE

**CHECKED:**

NAME OF COMPETENT PERSON:

A.A. Steyn

REG No: Pr.Arch. 20832

SIGNATURE

**PROJECT NUMBER**

**S-TSH-001-30**

**OCCUPANCY CLASSIFICATION**

**A3**

DATE:  
10-08-2021

DWG No:

**407**

REV No:


**03**

**DOOR SCHEDULE**

**DOOR NO. D 1**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

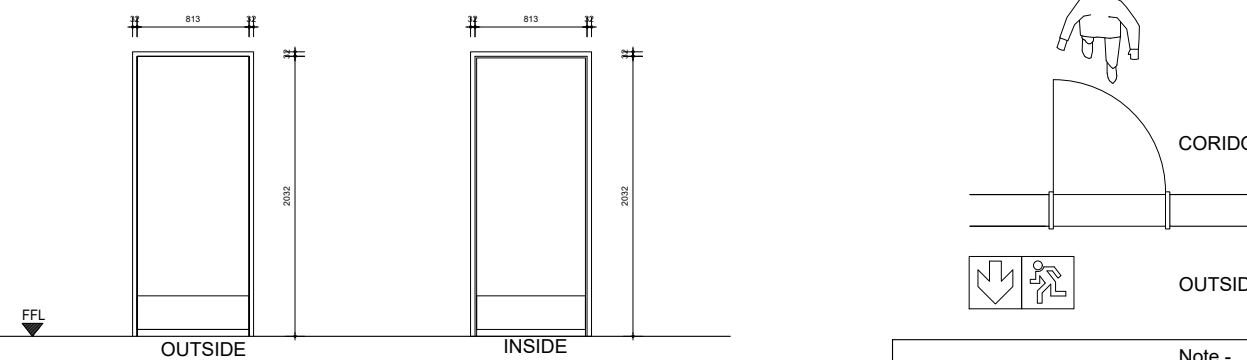

**QUANTITY & HAND** 9 (FOR HAND - REFER TO PLANS) **ENTRANCE DOOR**

**DOOR & FINISH**

815 X 2032 X 44 STANDARD HARDWOOD DOOR WITH MASONITE BACKING SUITABLE FOR PAINTING  
DOOR TO BE SUPPLIED WITH TIMBER 'LOCKLOCKS' TO TAKE IRONMONGERY AS SPECIFIED.  
DOOR TO BE PROVIDED WITH 250mm HIGH x 1.6mm STAINLESS STEEL PROTECTION PLATE  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS FOR POWERFLOATED CONCRETE FLOORS.  
FRAME FOR 220mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 2**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

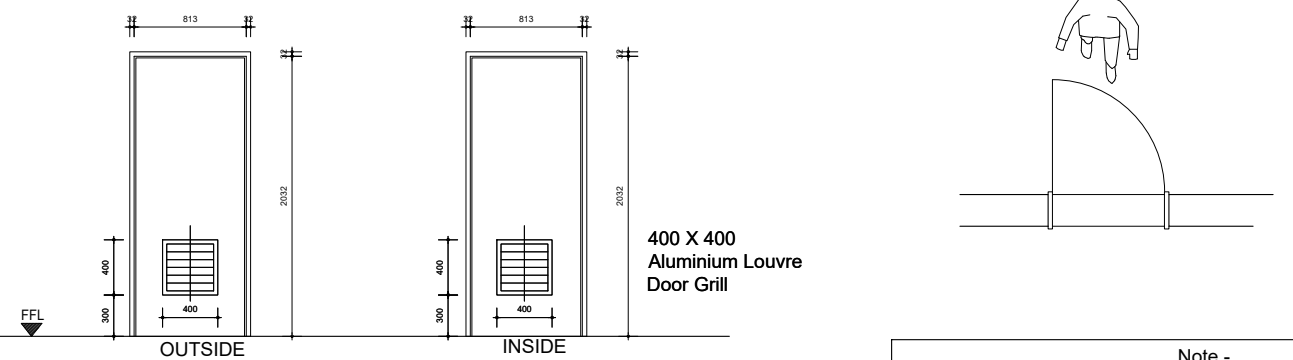

**QUANTITY & HAND** 10 (FOR HAND - REFER TO PLANS) **OFFICE**

**DOOR & FINISH**

2032 x 813 SEMI-SOLID DOOR WITH MASONITE FINISH SUITABLE FOR PAINTING.  
DOOR TO BE SUPPLIED COMPLETE AS PER MANUFACTURER'S SPEC.  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS FOR POWERFLOATED CONCRETE FLOORS.  
FRAME FOR 110mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 3**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

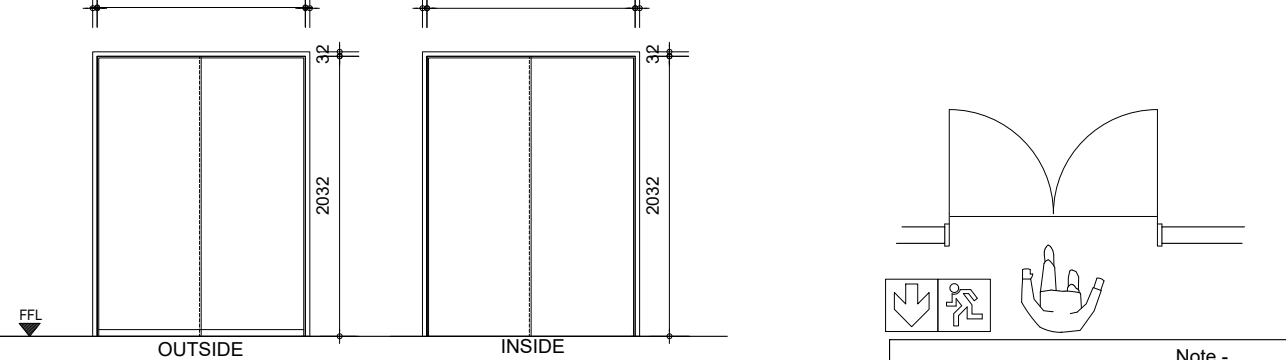

**QUANTITY & HAND** 4 (FOR HAND - REFER TO PLANS) **ENTRANCE DOOR**

**DOOR & FINISH**

1613 X 2032 X 44 STANDARD HARDWOOD DOOR WITH MASONITE BACKING SUITABLE FOR PAINTING  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS FOR POWERFLOATED CONCRETE FLOORS.  
FRAME FOR 220mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 4**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

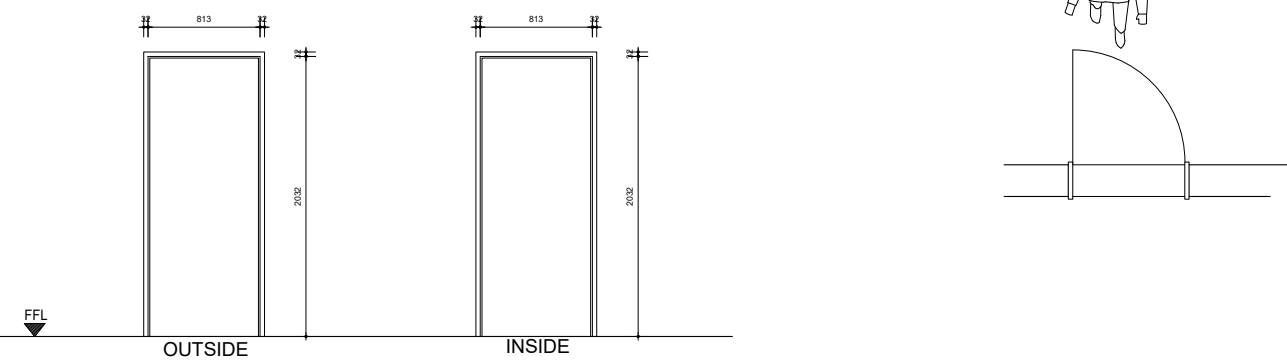

**QUANTITY & HAND** 1 (FOR HAND - REFER TO PLANS) **STRONG ROOM**

**DOOR & FINISH**

STANDARD STRONG ROOM DOOR  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD STRONG ROOM DOOR FRAME AS PER MANUFACTURER  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 5**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

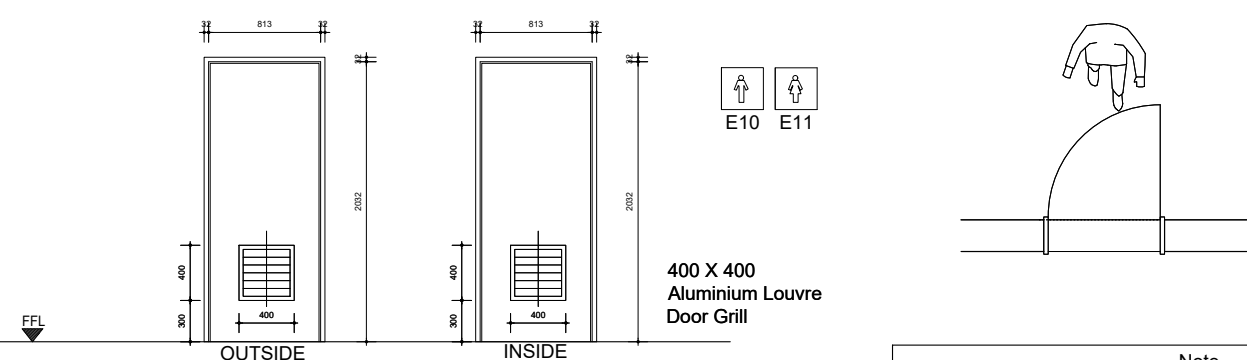

**QUANTITY & HAND** 7 (FOR HAND - REFER TO PLANS) **WC ENTRANCE**

**DOOR & FINISH**

2032 x 813 x 44mm THICK SEMI-SOLID FLUSH PANEL DOOR WITH MASONITE AND CONCEALED EDGES SUITABLE FOR PAINTING.  
DOOR TO BE SUPPLIED WITH TIMBER 'LOCKLOCKS' TO TAKE IRONMONGERY AS SPECIFIED.  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS.  
FRAME FOR 110mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 6**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

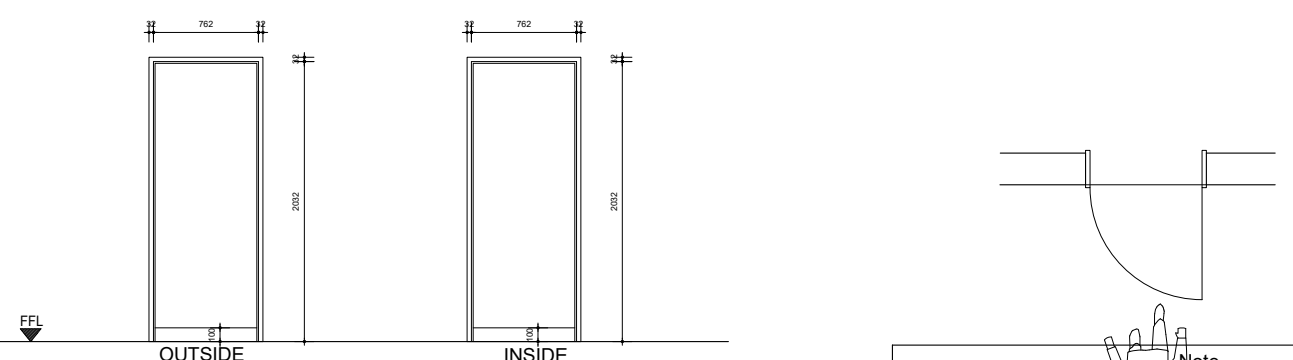

**QUANTITY & HAND** 15 (FOR HAND - REFER TO PLANS) **WC**

**DOOR & FINISH**

813 x 762 x 44mm THICK SEMI-SOLID FLUSH PANEL DOOR WITH MASONITE AND CONCEALED EDGES SUITABLE FOR PAINTING.  
DOOR TO BE SUPPLIED WITH TIMBER 'LOCKLOCKS' TO TAKE IRONMONGERY AS SPECIFIED.  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS.  
FRAME FOR 110mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 6A**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

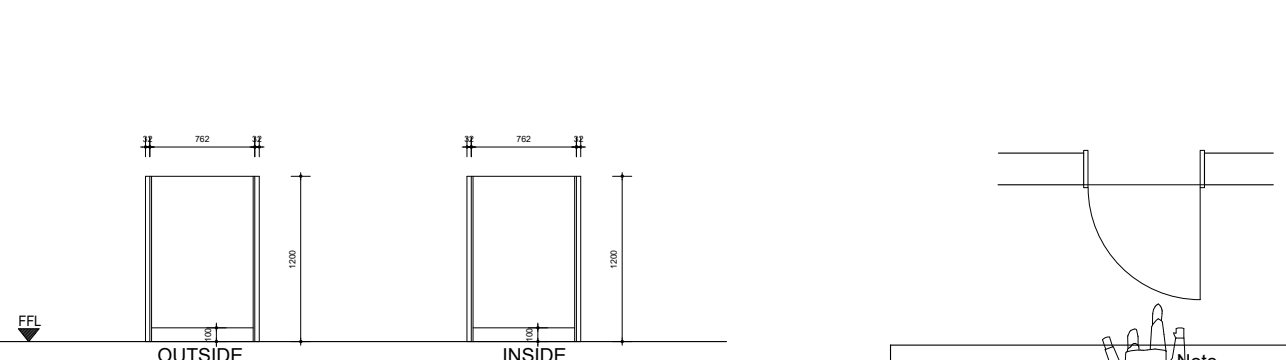

**QUANTITY & HAND** 2 (FOR HAND - REFER TO PLANS) **WC**

**DOOR & FINISH**

1100 x 762 x 44mm THICK SEMI-SOLID FLUSH PANEL DOOR WITH MASONITE AND CONCEALED EDGES SUITABLE FOR PAINTING.  
DOOR TO BE SUPPLIED WITH TIMBER 'LOCKLOCKS' TO TAKE IRONMONGERY AS SPECIFIED.  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**


1200mm HIGH TREATED HARDWOOD TIMBER JAMBS. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS.  
FRAME FOR 110mm WALL  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017

**DOOR SCHEDULE**

**DOOR NO. D 7**

**GENERAL NOTES:**

Measure final dimensions of all openings prior to ordering

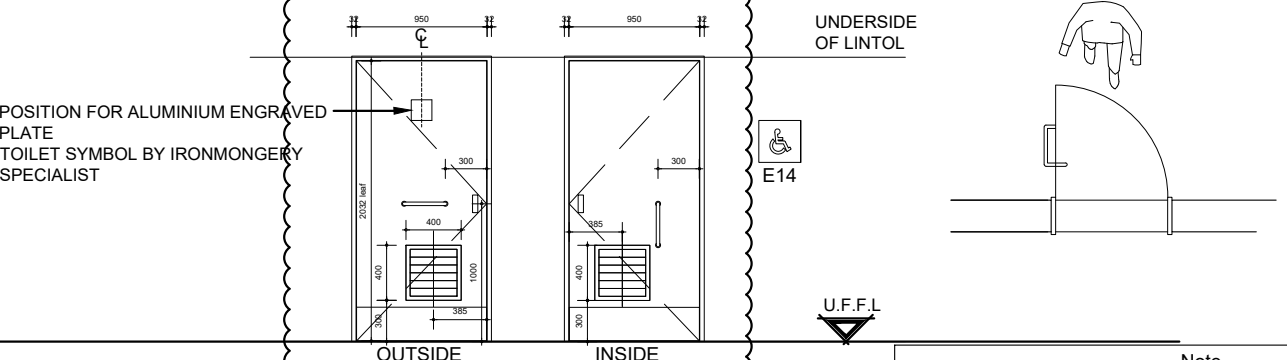

**QUANTITY & HAND** 3 (FOR HAND - REFER TO PLANS) **DISABLED TOILET ENTRANCE DOORS**

**DOOR & FINISH**

813 x 950 x 44mm THICK SEMI-SOLID FLUSH PANEL DOOR WITH MASONITE AND CONCEALED EDGES SUITABLE FOR PAINTING.  
DOOR TO BE SUPPLIED WITH TIMBER 'LOCKLOCKS' TO TAKE IRONMONGERY AS SPECIFIED.  
DOOR TO BE PROVIDED WITH 250mm HIGH x 1.6mm STAINLESS STEEL PROTECTION PLATE  
ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR WOOD (Full Coat)  
TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: WOOD SMOKE 40YY 41054

**FRAME & FINISH**

STANDARD 1.6mm THICK PRESSED METAL DOOR FRAMES WITH DOUBLE REBATE WITH PROFILES TO CONFORM TO SABS 1128-1977. FITTED COMPLETE WITH ONE AND A HALF PAIR HEAVY DUTY BUTT HINGES 100mm / 4.2mm THICK FLANGED. ADJUSTABLE STRIKING PLATE, RUBBER BUFFERS TO LOCK AND JAMB AND FIXING LUGS.  
FRAME FOR 110mm WALL  
PRESSED METAL FRAME TO BE THOROUGHLY CLEANED TO REMOVE OIL SUBSTRATE. ONE COAT DULUX (OR EQUALLY APPROVED) PRIMER FOR STEEL (Patch coat). ONE COAT DULUX TRADE UNIVERSAL (OR EQUALLY APPROVED) UNDERCOAT. TWO COATS DULUX PEARLGLO (OR EQUALLY APPROVED) WATER-BASED ENAMEL  
COLOUR: STORM BIRD 20YY 11017