

GENERAL NOTES
 THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEER'S DRAWING.
 ALL DIMENSIONS, LEVELS, ETC. ARE TO BE CHECKED BEFORE ANY WORK IS COMMENCED AND ANY DISCREPANCIES NOTED TO BE BROUGHT TO THE ARCHITECT'S ATTENTION.
 ONLY FIGURED DIMENSIONS TO BE USED. SCALING OF DRAWINGS IS NOT ADVISABLE.
 ALL RIGHTS RESERVED. NO PARTS OF THIS DESIGN SHALL BE REPRODUCED, USED ELSEWHERE AND/ OR IN ANY WAY WITHOUT PRIOR PERMISSION FROM THE ARCHITECT/ ENGINEER.

GEOTECH INFORMATION

SOIL TYPE: _____
 ASSUMED SOIL BEARING CAPACITY: _____ kPa
 RECOMMENDED FOUNDATION TYPE: _____
 RECOMMENDED FOUNDATION DEPTH: _____

REV No.	DATE	DESCRIPTION

MUNICIPAL APPROVAL

NAME: _____
 SIGNATURE: _____ DATE: _____

STAMPS:

CLIENT APPROVALS

North West Department of Education:
 NAME: _____ SIGNATURE: _____ DATE: _____
DBSA Architect:
 NAME: _____ SIGNATURE: _____ DATE: _____
DBSA OH&S:
 NAME: _____ SIGNATURE: _____ DATE: _____

PRINCIPAL AGENT

KITSO BOTHLALE
 CONSULTING ENGINEERS (Pty) Ltd
 Tel +27(0)12 663 1357 - Cell +27 (0) 82 903 8497 - Fax +27(0)12 663 3331
 E-mail kbotso@kitso.co.za Website www.kitso.co.za
 Unit 2 International Business Gateway, 18 Midridge Park, C/o Pioneer Avenue & Elizabeth Road, Extension 6 Midridge Park, Midrand, 1682

COMPETENT CONTACT PERSON: Bruce Mutaurwa CONTACT No: +27 (0)12 663 1357
 FIRM REG No: T.B.C.

education
 Lefapha la Thuto
 Onderwys Departement
 Department of Education
NORTH WEST PROVINCE

DEPARTMENT OF BASIC EDUCATION
222 STRUBEN STREET
PRETORIA

DISCIPLINE
ARCHITECTURAL

PROJECT NAME
Tshedimoso Primary School
 PORTION 1 OF THE FARM MOOIPAN No. 104 - IO
 MEASURING - 33 479 m²

PROJECT STATUS

STAGE 1-3	STAGE 4	STAGE 5-6
CONCEPT	TENDER	CONSTRUCTION
	X	

DESCRIPTION
GRADE - R
(BLOCK 4)
FLOOR FINISH LAYOUT

SCALE:
 AS SHOWN

DRAWN: D. Basson
 NAME OF COMPETENT PERSON: D. Basson
 REG No: PSAT 30522947
 SIGNATURE: _____

CHECKED: M.L. van der Walt
 NAME OF COMPETENT PERSON: M.L. van der Walt
 REG No: Pr.Arch. 7292
 SIGNATURE: _____

SIGNATURE: _____

PROJECT NUMBER
S-TSH-001-30

DATE:
11-10-2021

OCCUPANCY CLASSIFICATION
A3

DWG No:
216

REV No:
01

KEY LEGEND & SPECIFICATIONS:

FLOORFLEX VINYL TILE: MALACHITE Code: MF2528 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m² and 6.5m² per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.

FLOORFLEX VINYL TILE: PALE WOOD Code: MF 2534 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m² and 6.5m² per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.

SUPERFLEX VINYL TILE: CLOUD WISP Code: MS 131 (or equally approved) Supply and fix 2mm thick 300x300mm fully flexible vinyl tiles manufactured in accordance to SANS 786 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m² and 6.5m² per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.

FLOORFLEX VINYL TILE: LAPIS LAZULI Code: MF2525 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m² and 6.5m² per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.


FLOORFLEX VINYL TILE: TAMBOTI Code: MF 2515 (or equally approved) Supply and fix 2mm thick 300x300mm semi-flexible vinyl tiles manufactured in accordance to SANS 581 and laid in FloorworX (or equally approved) no.62 acrylic adhesive which has been spread using a trowel fitted with an A2 notched blade at a rate of between 5.5m² and 6.5m² per litre on a previously prepared class 1 sub-floor in accordance with SANS 10400, using Mapei Ultra Eco (or equally approved) self leveling screed.

VINYL TILE NOTE: The flooring must be rolled in both directions with an articulated 68kg three-sectional roller immediately after it has been laid into the adhesive. The newly laid floor must, after 48 hours, be stripped using FloorworX Stripper (or equally approved) scrubbed using a diluted solution of FloorworX Rinse (or equally approved) and then sealed with three coats of FloorworX Silk Matt Sealer (or equally approved).

WOOD FLOAT CONCRETE SCREED

Painted standard pine skirting 21x96mm (D x H)
 Refer to General Specification for paint specification.
Colour: Dulux (or equally approved) 20YY 11/017 Storm Bird

TILETORIA WALL TILES Shiny white 200x200mm GR1 1.52 MPB open wall 121.60MPP (or equal approved). Refer to Room Layout Drawings for height of tiles. Tile to be finished with a **KIRK MARKETING M-TRIM** PVC round edge tile 7mm size (depth) (or equal approved) Colour: White (PEE01)
 Tile Code: OSH100LA
 Trim Code: PRE070
TAL SUPER WHITE wall grout for 3mm wide tile joints. (or equal approved) REFER TO GENERAL SPECIFICATION.

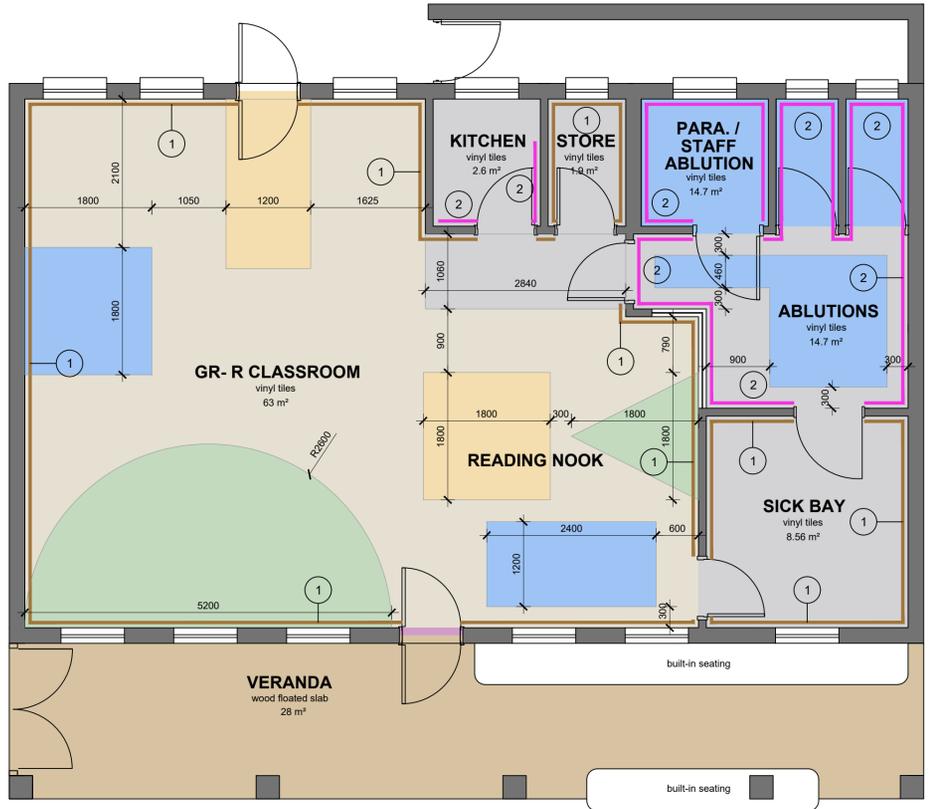

BLOCK 4 - GRADE-R FLOOR FINISH LAYOUT
 Scale 1:50

GENERAL NOTES:

THIS DRAWING MUST BE READ IN CONJUNCTION WITH THE GENERAL SPECIFICATION DOCUMENT AND LAYOUT DRAWINGS.

SAMPLES OF ALL FINISHES BE PROVIDED TO ARCHITECT FOR APPROVAL PRIOR TO ORDER AND INSTALLATION.

IT IS THE CONTRACTORS RESPONSIBILITY TO FAMILIARIZE THEMSELVES WITH THE DRAWINGS. SHOULD ANYTHING BE UNCLEAR THE CONTRACTOR NEEDS TO CONSULT FURTHER WITH THE CONSULTANT TEAM.

DESIGN OF SHAPES TO BE DRY STACKED FOR APPROVAL PRIOR TO GLUE DOWN OF TILES.

ALL TILES' ADHESIVE TO BE APPLIED ON THE FULL EXTENT OF THE TILE BACKING TO ALLOW FOR A FULL BONDAGE TO THE SUBSTRATE.